


CWDM-2200

Passive CWDM Mux / Demux

CWDM-2200




Features

- High performance & low cost
- 1510nm, 1531nm, 1550nm, 1571nm combiner / splitter
- Compact & rugged design 142mm(L) x 82mm(W) x 47mm(H)

Description

The CWDM-2200 is a 4 channel high performance passive optical multiplexer and de-multiplexer (1511nm, 1531nm, 1551nm & 1571nm) When used with the Prolinx optical transmitter and the appropriate wavelengths, four channels of HD,SD or ASI can be transmitted over a single fibre. Each channel is independent of data rate and format.

Specifications

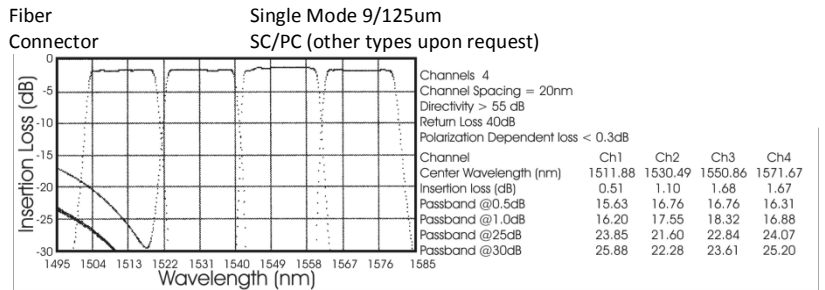

Compatibility

Compatible with all SBC products supporting digital video interfaces

Ordering Information

CWDM-2200 1510, 1531, 1550, 1571nm splitter / combiner with SC/PC connectors